




ZirChrom®


Technical Bulletin #310



... For Peak Performance

High Temperature Stability of Sachtopore-RP

Performance at 100° C using Metalox® 200-C Column Heater

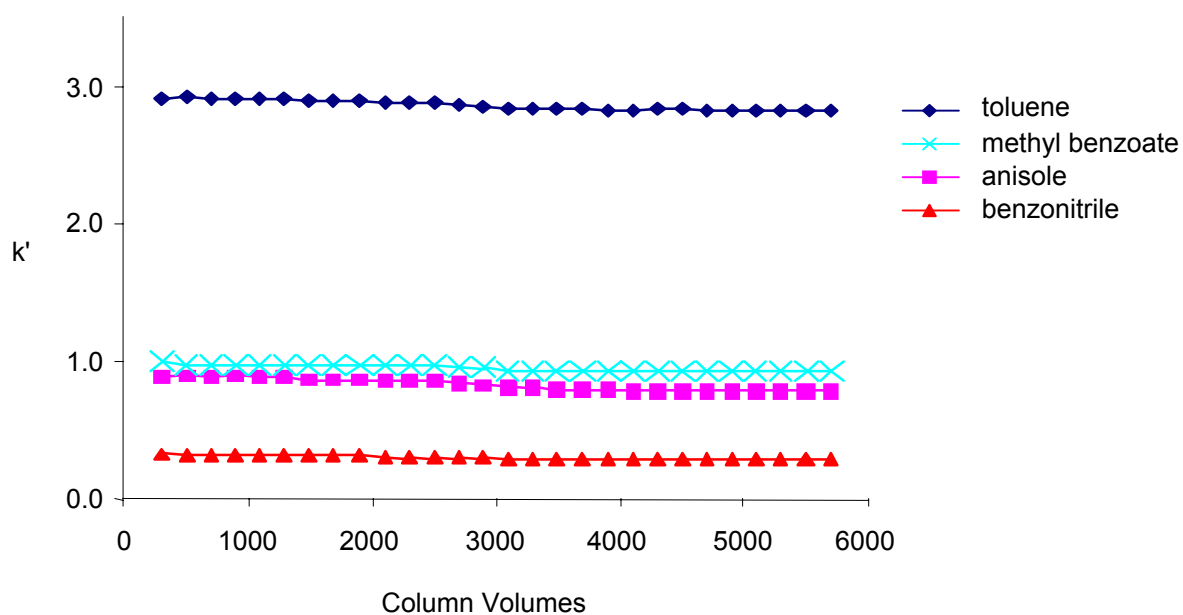

LC Conditions

Column: Sachtopore-RP, 50 × 4.6 mm (3 μm, 300 Å)

Mobile Phase: 15/85 A/B

A: Acetonitrile

B: Water

Flow Rate: 1.0 mL/min.

Temperature: 100 °C

Injection Volume: 5.0 μl

Detection: 254 nm

